
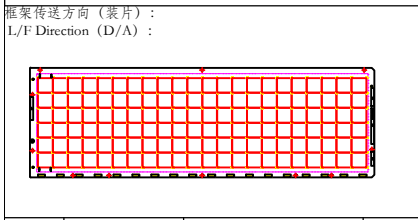


 <b>池州华宇电子科技股份有限公司</b> CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD <b>焊线图纸 Bonding Diagram</b>				客户代码 Customer No.	808	线图号 Drawing No.	HY-PX-808-023 A		页码 Page 1 / 2
				产品名称 Product Type	GHS256K8		封装外型 PKG Type	LGA16L(10.33×10.45×1.31-P1.27)	
焊线种类 Wire Type	焊线直径(μm) Wire Diameter	焊线根数 NO. of wire	焊线总长(μm) Total wire length	最长线长(μm) Longest wire length	最短线长(μm) Shortest wire length	塑封料型号(绿色环保) Compound Type (Green)		基板编码 Substrate No.	
金丝 Au	25	8	14418	2846	566	首选(Preferred): G770 备选(Optional):		LGA16(102102)808013	
劈刀型号 Capillary Type		首选(Preferred): SU-33120-405F-RU34TP-250-Y 备选(Optional):			客户图号 Customer drawing NO.				

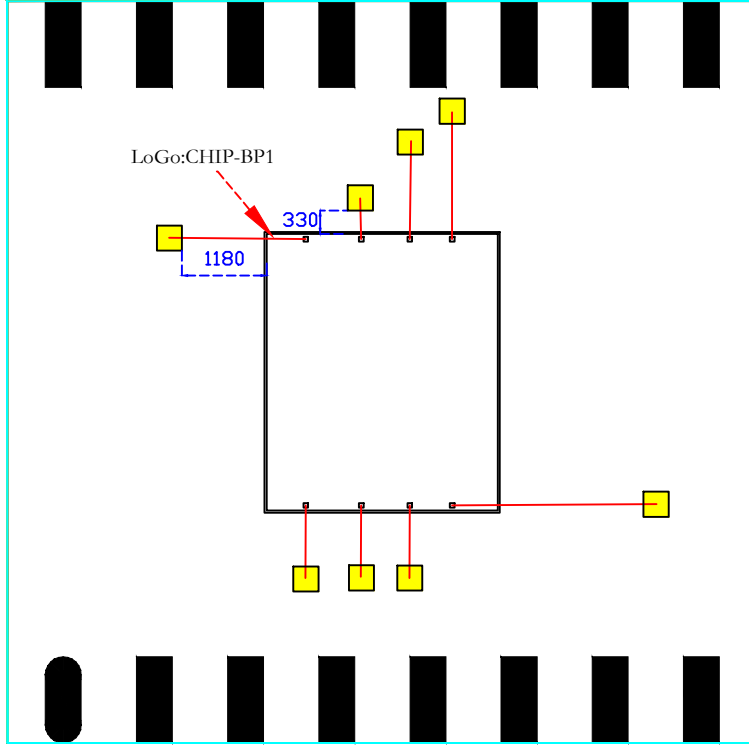

实物图:  
Chip photo:


特殊说明 Special Instructions:

DB注意:  
1.装片位置公差为±30μm;  
2.控制溢胶,为WB预留焊线位置。

说明 Instructions	粘片胶类型 epoxy type	芯片名称 Die name	芯片尺寸 Die Size	最小焊盘尺寸 Min BFO (μm <sup>2</sup> )	最小焊盘间距 Min BFP(μm)	铝垫厚度(μm) Pad Thickness	焊盘下是否有电路 Circuit under Pad	划片道宽度 Street line (μm)	晶圆尺寸 Wafer Size	是否是 Low-K If low-k?	减薄厚度 (μm) Wafer Thickness
A芯: DIE A	导电胶 (conductivity) S820	GH85RS2M	3218*3850(μm <sup>2</sup> ) 126.69*151.67(mil <sup>2</sup> )	65*65	NA	2.3	否/NO	60	8	否/NO	200 (客户要求)
B芯: DIE B											
C芯: DIE C											
D芯: DIE D											
E芯: DIE E											
F芯: DIE F											
G芯: DIE G											
制图日期 Create Date		2023/10/25			生效日期 Effective Date		客户确认签字/盖章: Customer Signature				
拟制 Prepared by		审核 Checked by		批准 Approved by							

\*温馨提示: 图纸为产品下线生产的唯一依据, 请您认真确认, 我可依据您回签后的图纸生产, 如图纸错误会产生不可估量损失, 谢谢!  
\*warm tips: the drawing is the only basis for the production of the product. Please confirm it carefully. Our company will produce the drawings according to the drawings you have signed back, such as drawing mistakes, which will produce inestimable loss. Thank you

 <b>池州华宇电子科技股份有限公司</b> CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD 焊线图纸 Bonding Diagram				客户代码 Customer No.	808	线图号 Drawing No.	HY-PX-808-023 A	页码 Page 2 / 2
				产品名称 Product Type	GHS256K8		封装外型 PKG Type	LGA16L(10.33×10.45×1.31-P1.27)
焊线种类 Wire Type	焊线直径(μm) Wire Diameter	焊线根数 NO. of wire	焊线总长(μm) Total wire length	最长线长(μm) Longest wire length	最短线长(μm) Shortest wire length	塑封料型号(绿色环保) Compound Type (Green)		基板编码 Substrate No.
金丝 Au	25	8	14418	2846	566	首选(Preferred): G770 备选(Optional):		LGA16(102102)808013
剪刀型号 Capillary Type		首选(Preferred): SU-33120-405F-RU34TP-250-Y 备选(Optional):		客户图号 Customer drawing NO.				

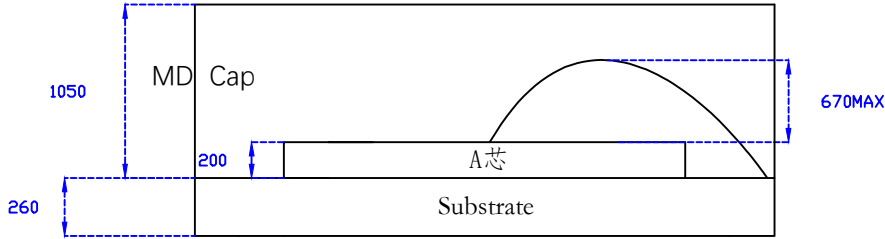

制图日期 Create Date		2023/10/25		生效日期 Effective Date		客户确认签字/盖章: Customer Signature	
拟制 Prepared by		审核 Checked by		批准 Approved by		数量	位号

\*温馨提示: 图纸为产品下线生产的唯一依据, 请您认真确认, 我司依据您回签后的图纸生产, 如图纸错误会产生不可估量损失, 谢谢!  
 \*warm tips: the drawing is the only basis for the production of the product. Please confirm it carefully. Our company will produce the drawings according to the drawings you have signed back, such as drawing mistakes, which will produce incalculable loss. Thank you